


Product Category: Chemicals

SM100I - CORROSION INHIBITOR CONCENTRATE

EAN	5027639500904
Product Code	500904
Volume	250ml Bottle
Treats	100 litre (10 rad)
Colour Code	Yellow
Leave in System (Min)	N/A
Leave in System (Max)	N/A
Liquid Colour	Dark Straw
Box Quantity	12
Shelf Life	Minimum 3 Years

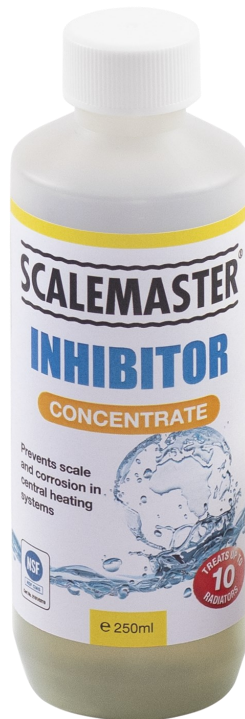

**TECHNICAL
HELPLINE
01785 811636**

**MADE IN
BRITAIN**



SM100I Concentrate - Corrosion Inhibitor - Prevents corrosion, hard water limescale precipitation and is essential for protecting hot water heating systems and maintaining operational efficiency.

Dose Rate:

Bottle contains 250ml at double concentration. Minimum dosage to achieve the NSF CIAS performance specification is 250ml per 100 litres of system water (up to 10 radiators). Compatible with aluminium. No problems occur through overdosing (up to double dose) or mixing of Instinct chemicals.

Application:

Dose via the feed and expansion tank or via a radiator as per BS/7593. **Leave in the system.** For best results first flush system with Scalemaster SM3 System Cleaner or Scalemaster SM4 Sludge Remover.

Health & Safety:

Keep out of reach of children. Dispose of contents & container in accordance with national regulations. Safety Data Sheet available upon request. Do not use with PRIMATIC single feed cylinders.

Manufactured in the UK by Scalemaster® Limited.

All Scalemaster® Heating System Chemicals are manufactured using non-hazardous formulations.

Product Category: Chemicals

SM100I - CORROSION INHIBITOR CONCENTRATE

EAN	5027639500980
Product Code	500980
Volume	5 Litre Jerry Can
Treats	2000 Litre
Colour Code	Yellow
Leave in System (Min)	N/A
Leave in System (Max)	N/A
Liquid Colour	Dark Straw
Box Quantity	4
Shelf Life	Minimum 3 Years



MADE IN
BRITAIN



SM100I Concentrate - Corrosion Inhibitor - Prevents corrosion, hard water limescale precipitation and is essential for protecting hot water heating systems and maintaining operational efficiency.

Dose Rate:

Container contains 5 Litre at double concentration, enough to dose 2000 litres Minimum dosage to achieve the NSF CIAS performance specification is 500ml per 100 litres of system water. Compatible with aluminium. No problems occur through overdosing (up to double dose) or mixing of Scalemaster chemicals.

Application:

Dose via the feed and expansion tank or via a radiator as per BS/7593. **Leave in the system.** For best results first flush system with Scalemaster SM3 System Cleaner or Scalemaster SM4 Sludge Remover.

Health & Safety:

Keep out of reach of children. Dispose of contents & container in accordance with national regulations. Safety Data Sheet available upon request. Do not use with PRIMATIC single feed cylinders.

Manufactured in the UK by Scalemaster® Limited.

All Scalemaster® Heating System Chemicals are manufactured using non-hazardous formulations.